

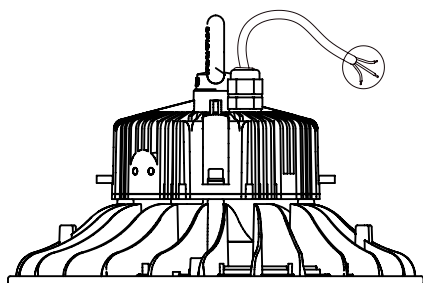


DURA LAMP

HIBAY-HB2 - IP65

220-240V 50/60HZ - 4000K




HB2-100	- 100W - 13000lm - IK08 - 90° - Ø = 262mm - L = 174mm
HB2-200	- 200W - 26000lm - IK07 - 120° - Ø = 347mm - L = 193mm
HB2-200DALI	- 200W - 26000lm - IK07 - 120° - Ø = 347mm - L = 193mm





AC

HB2-100
HB2-200



Attenzione: Togliere tensione all'impianto elettrico prima di collegare il prodotto.
Attention: Power off the line before connecting the product.
Attention: Mettre le réseau électrique hors tension avant de brancher le produit.
Pozor: Pred priklopom svetilke na el. omrežje je potrebno izklopiti varovalko ipd.

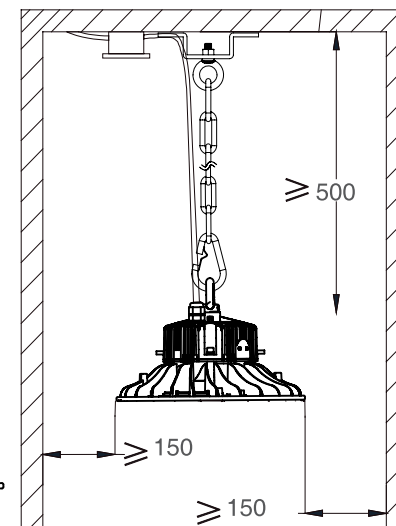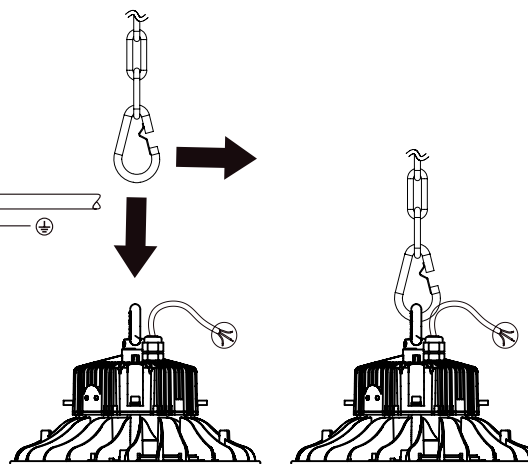

Cavo di prevenzione delle cadute
Fall prevention wire

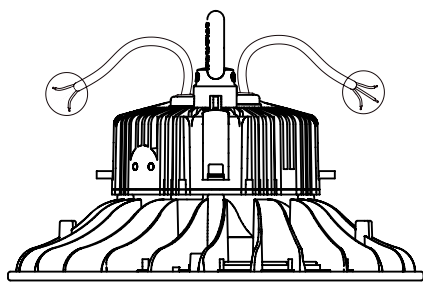

HB2-200DALI

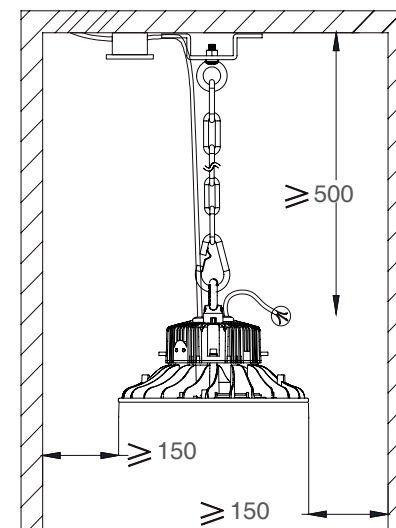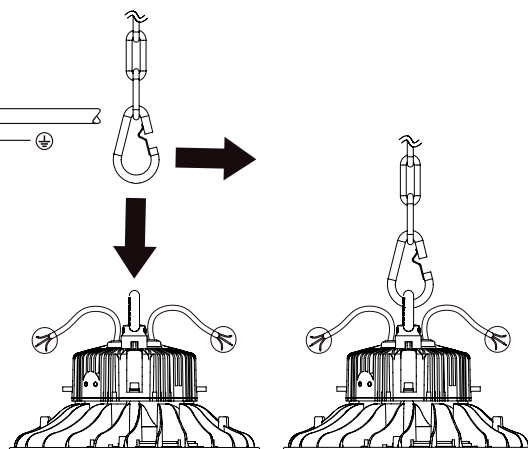

RG1 UNLIMITED

RG1 secondo norma IEC/TR 62778:2014 / RG1 in accordance with IEC/TR 62778:2014
RG1 selon la norme IEC/TR 62778:2014 / RG1 nach der norm IEC/TR 62778:2014
RG1 enlight IEC/TR 62778:2014 / RG1 volgens IEC/TR 62778:2014
RG1 de acordo com norma IEC/TR 62778:2014 / RG1 po predpisu IEC/TR 62778:2014

Duralamp SpA

Via Pratese, 164 - 50145 Florence - Italy

Per maggiori dettagli tecnici visita il sito / For more technical details please check our website / Pour plus de détails techniques, visitez le site Web / Für weitere technische Details, besuchen Sie unsere Website/Para más detalles técnicos, visite nuestro sitio web/ Več tehničnih informacij na voljo na spletni strani:

www.duralamp.it